

TOLÉ

chrome-plated




height 1902 mm, length 581 mm. Chrome-plated finish (cod. 50).

The incisive cut and the clean stamp make TOLÉ a radiator with a creative, powerful and refined design. The square radiant elements in chromed brass

outline a completely original, technological, light, new geometry, which conquers the space in which it is inserted with his decisive and modern personality.

TOLÉ

chrome-plated

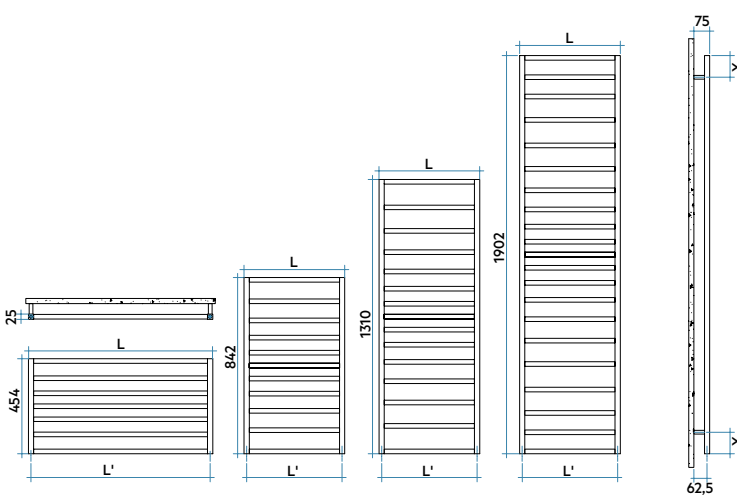

H mm X mm	
454	93
842	113
1310	133
1902	103

X mm	L mm	L' mm
842/1310/1902	481	456
454/842/1310/1902	525	500
842/1310/1902	581	556
454	881	856



Thermal Power

Model	Depth P mm	Height H mm	Width L mm	Ccentre L' mm	Weight Kg	Cap. lt	$\Delta t=50^{\circ}\text{C}$ Btu/h	Thermal Power				Exp. n.
								$\Delta t=50^{\circ}\text{C}$ Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (°)	$\Delta t=20^{\circ}\text{C}$ Watt	
454 7 rails	25	454	525	500	3,0	1,2	513	150	114	79	48	1,250
	25	454	881	856	4,4	1,9	811	238	181	128	78	1,220
842 11 rails	25	842	481	456	4,7	1,8	788	231	175	122	73	1,250
	25	842	525	500	5,0	1,9	847	248	188	131	79	1,250
	25	842	581	556	5,3	2,1	932	273	207	145	88	1,240
1310 15 rails	25	1310	481	456	6,7	2,5	1174	344	261	183	111	1,240
	25	1310	525	500	7,1	2,7	1257	368	280	196	119	1,240
	25	1310	581	556	7,5	2,9	1352	396	301	211	128	1,230
1902 21 rails	25	1902	481	456	9,5	3,5	1708	501	379	265	159	1,250
	25	1902	525	500	10,0	3,8	1828	536	405	283	171	1,250
	25	1902	581	556	10,7	4,1	1973	578	438	306	184	1,250

(*) Thanks to the high performance of Irsap TOLÉ CHROME-PLATED radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula:

$$Q=Q_n (\Delta t / 50)^n$$

Available only in chrome-plated finish.

- Maximum working pressure 4 bar
- Maximum working temperature 95°C

STANDARD SUPPLY: angle pattern valve and lockshield valve assembly complete with copper fitting (diameters: 12, 14, 15 mm); kit of pipe covers (suitable for pipes up to 16 mm thick); 4 wall fixing brackets; 1/2" air vent chrome-plated.