




TERMA

SINCE 1990

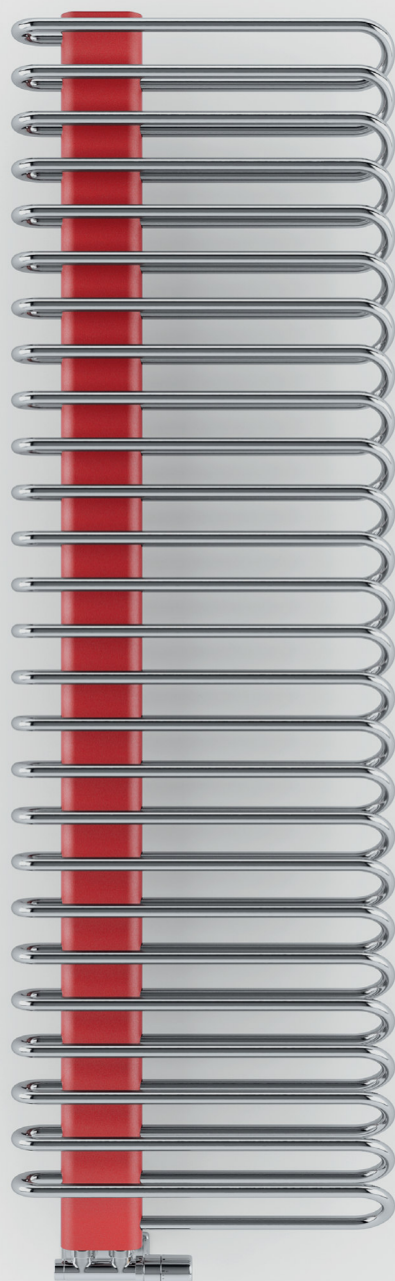

◀ **Radiator**

Michelle 1620↑ x 500↔ YL,
radiator colour: Chrom, masking front colour: Metallic Red
radiator code: WGMIC162050 KCROYL
masking front code: WRCMIC078L KMRE

Valves and accessories

Integrated thermostatic valve, angled, left, Chrome
SLIM thermostatic head, Chrome
Integrated pipe-masking set, Chrome

251 COLORS
AND CHROME




MICHELLE





AVAILABLE SIZES

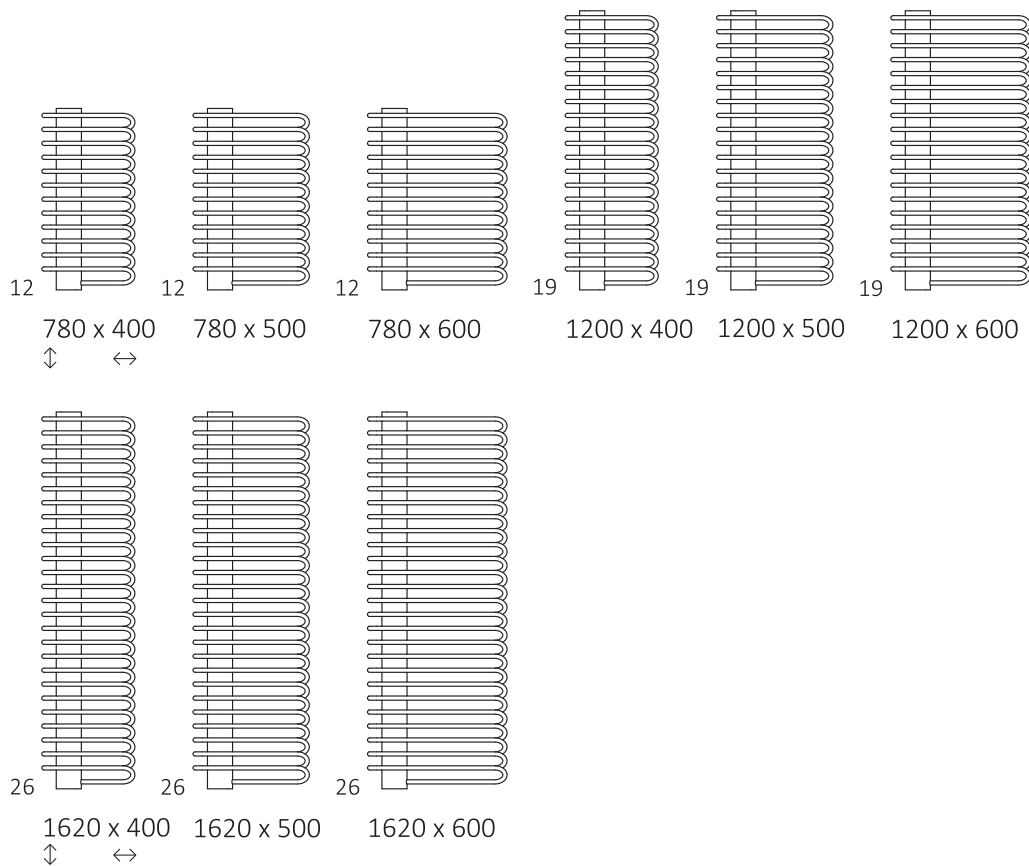

NOTE: THE COMPLETE PRODUCT CONSISTS OF TWO PARTS: THE RADIATOR AND THE MASKING FRONT.



1. RADIATOR

CENTRAL HEATING / DUAL FUEL

Connections:




Height A ↓ [mm]	Width B ↔ [mm]	Heating power – powder paint			Heating power – plated finishes			Product code ... Configuration p.7
		75/65/20°C [W]	55/45/20°C [W]	[W]	75/65/20°C [W]	55/45/20°C [W]	[W]	
780	400	365	196	400	256	131	300	WGMIC078040...
780	500	455	244	400	319	163	300	WGMIC078050...
780	600	533	286	600	373	190	400	WGMIC078060...
1200	400	580	310	600	406	207	400	WGMIC120040...
1200	500	721	386	800	505	258	600	WGMIC120050...

Height A ⇅ [mm]	Width B ↔ [mm]	Heating power – powder paint			Heating power – plated finishes			Product code ... Configuration p. 7
		75/65/20°C [W]	55/45/20°C [W]	 [W]	75/65/20°C [W]	55/45/20°C [W]	 [W]	
1200	600	845	452	800	592	302	600	WGMIC120060...
1620	400	805	429	800	564	288	600	WGMIC162040...
1620	500	1000	533	1000	700	357	800	WGMIC162050...
1620	600	1172	624	1200	820	418	800	WGMIC162060...

DIMENSIONS AND TECHNICAL INFORMATION

Working pressure: 1000 kPa

Maximum operating temperature: 95°C

Height A ⇅ [mm]	Width B ↔ [mm]	Spacing connection C1 [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity	Weight	Capacity	Weight
						(powder paint)  [dm³]	(powder paint)  [kg]	(plated finishes)  [dm³]	(plated finishes)  [kg]
780	400	50	50	600	90	2,85	11,51	2,85	11,23
780	500	50	50	600	90	3,30	12,80	3,30	12,47
780	600	50	50	600	90	3,75	14,10	3,75	13,71
1200	400	50	50	1020	90	4,47	18,03	4,47	17,59
1200	500	50	50	1020	90	5,19	20,07	5,19	19,55
1200	600	50	50	1020	90	5,90	22,13	5,90	21,52
1620	400	50	50	1440	90	6,11	24,59	6,11	23,99
1620	500	50	50	1440	90	7,09	27,40	7,09	26,68
1620	600	50	50	1440	90	8,07	30,20	8,07	29,37





ELECTRIC RADIATOR

Connections:





Height A ⇅ [mm]	Width B ↔ [mm]	Heating power – powder paint [W]	Heating power – plated finishes [W]	Product code ... Configuration p. 8
1200	400	600	400	WLMIC120040...
1200	500	800	600	WLMIC120050...
1200	600	800	600	WLMIC120060...
1620	400	800	600	WLMIC162040...
1620	500	1000	800	WLMIC162050...
1620	600	1200	800	WLMIC162060...

DIMENSIONS AND TECHNICAL INFORMATION

Height A ↕ [mm]	Width B ↔ [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity (powder paint)  [dm ³]	Weight (powder paint)  [kg]	Capacity (plated finishes)  [dm ³]	Weight (plated finishes)  [kg]
1200	400	50	1020	90	4,46	19,45	4,46	19,01
1200	500	50	1020	90	5,18	22,09	5,18	21,57
1200	600	50	1020	90	5,90	24,72	5,90	24,11
1620	400	50	1440	90	6,10	26,55	6,10	25,95
1620	500	50	1440	90	7,08	30,15	7,08	29,43
1620	600	50	1440	90	8,06	33,75	8,06	32,92


2. MASKING FRONT

(CONNECTION YL - LEFT MASKING FRONT, CONNECTION YP - RIGHT MASKING FRONT)




A ↕ [mm]	B ↔ [mm]	Depth G [mm]	Capacity (powder paint)  [kg]	Capacity (plated finishes)  [kg]	Product code ... Configuration p. 8
780	108	38	1,50	1,40	WRCMIC078L...
780	108	38	1,50	1,40	WRCMIC078P...
1200	108	38	2,24	2,10	WRCMIC120L...
1200	108	38	2,24	2,10	WRCMIC120P...
1620	108	38	3,00	2,80	WRCMIC162L...
1620	108	38	3,00	2,80	WRCMIC162P...

TECHNICAL DRAWING

YL

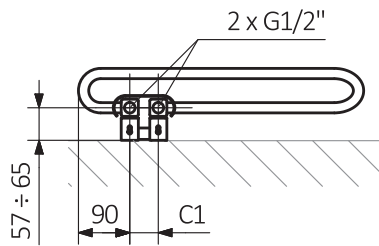


YP

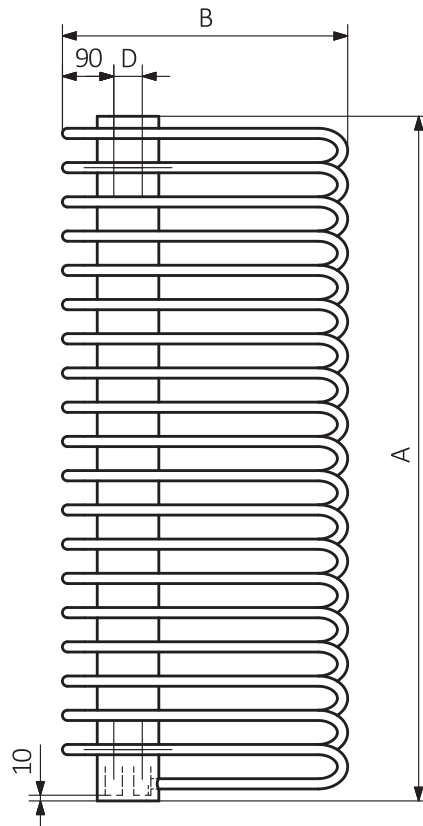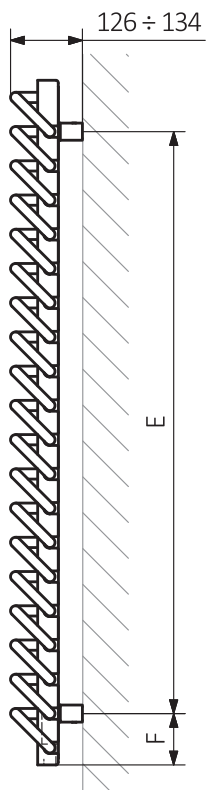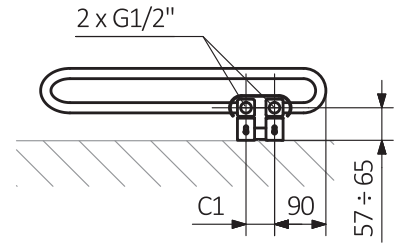

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:

